

Novatech®

600 Series Patio Doors



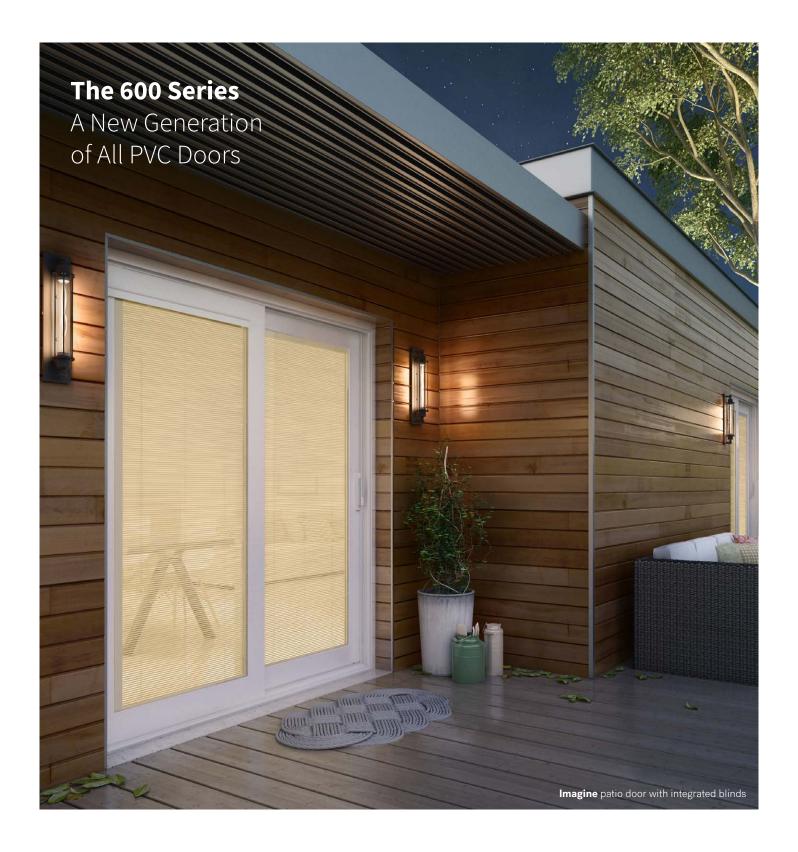


The 600 series patio doors are the result of 35 years of experience at Novatech. Beyond their **sleek** contempory style, these doors feature a unique and innovative wood insert in the jambs for added strength and easy installation, a **broad host of options** to suit any type of construction and a design that offers superior energy efficiency.

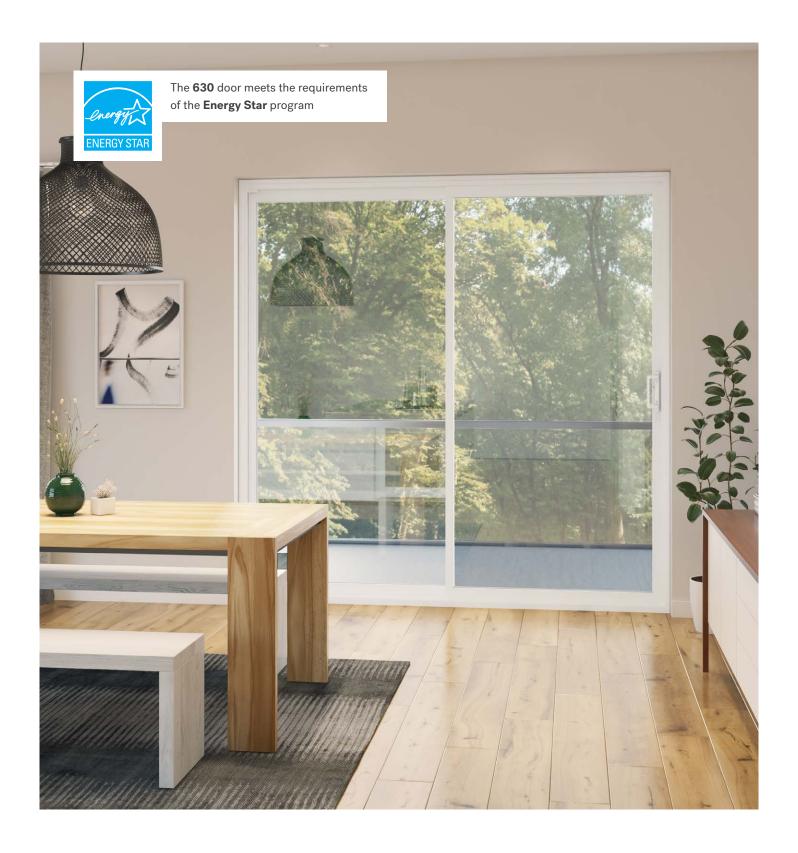

Enjoy the View With the **630** Patio Door

The 630 patio door matches any architectural style. Its narrow sash and large glass surface let you make the most of the outside view.

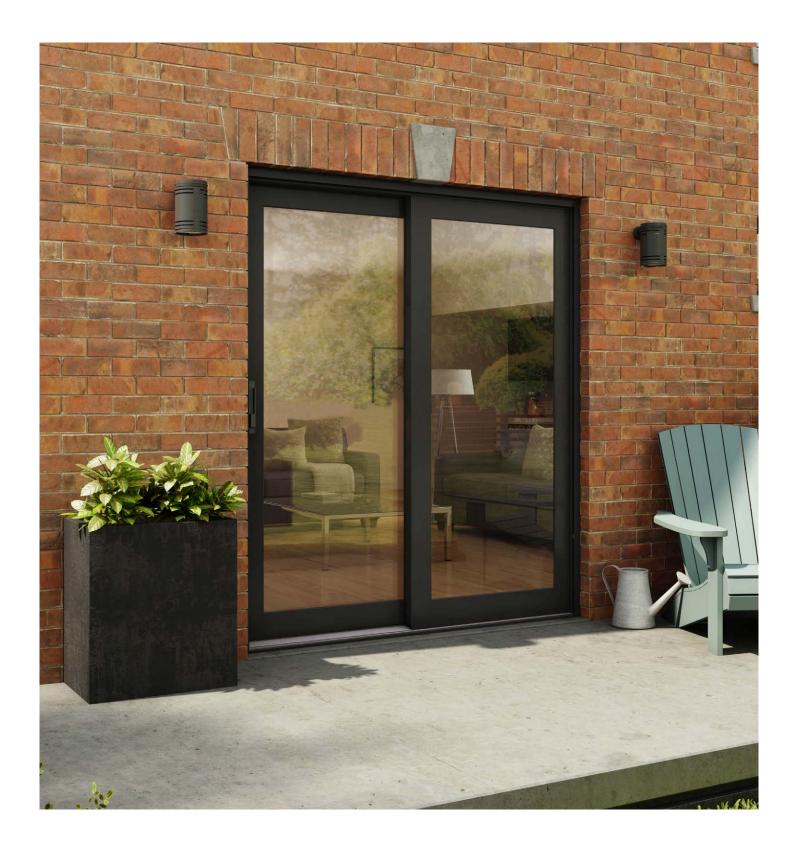

The **Imagine** Patio Door — Elegant and Stylish

Imagine provides all the charm of a *garden door* without the drawbacks of a hinged door. Its wide sash and styling options let you customize your door to be the focal point of the ${\sf room-both}$ architectural and practical.



	Features	630	IMAGINE	
	Frame			
	Multi-chambered PVC frame with wood inserts in side jambs	✓	✓	
	Frame depths from 5 ¾" to 11 ¾"	✓	✓	
	Quick draining sill sloped at 9°	✓	✓	
A	Aluminum sill cover Improved sill durability and superior finish	Option	~	
В	PVC cavity filler cap	Option	~	
	Sash			
	Steel reinforcements in the vertical stiles	✓	✓	
	45° fusion welded corners and interior glazing stops		✓	
	Wide garden door style sash		✓	
	Insulated Glass			
	Tempered Low E glass with low-conductive spacer	✓	✓	
	Hardware			
	9600 mortise handle NEW	✓		
	Look contemporary style mortise handle NEW		✓	
	View contemporary style mortise handle NEW		Option	

Options

Configurations X OPERATING PANEL O FIXED PANEL (OUTSIDE VIEW) 5′ 6′ 8' 7', 9' & 12' 7', 9' & 12' 10'& 12' 0 0 0 × 0 0 0 0 0 0 0 × 630 59½" × 79½" $71\frac{1}{2}$ " × $79\frac{1}{2}$ " 94½"×81" $86\%" \times 79\%"$ $89\frac{1}{4}$ " × $79\frac{1}{2}$ " (OXO) $117" \times 79 \frac{1}{2}"$ 58½" × 81" 70½"×81" 85 ¾16" × 81" $87\frac{3}{4}" \times 81" (OXO)$ 114 ¹⁵/₁₆" x 81" 104%"×79½" 140 ¹⁵/₁₆" x 79 ½" 1071/4" × 791/2" (OXO) 103¼"×81" 105%"×81"(OXO) 139 1/16" x 81" 139%"×81" $107\frac{1}{2}$ " × $79\frac{1}{2}$ " (OOX / XOO) $106\%6'' \times 81'' (00X/X00)$ 141¾"×81"(OXO)

Hardware

IMAGINE

Zinc or stainless steel double-point mortise option available Key lock and keyed alike options available.

71½"×79½"

70½"×81"



59½"×79½"

58½"×81"



Handle will be painted to match

the door color.

104" × 79½"

102 %6" × 81"

107%" × 79½" (OXO)

106 1/16" × 81" (OXO)

104" × 79½" (00X/X00)

 $102\%6" \times 81" (OOX/XOO)$

Black outside / White inside

Oil Rubbed Bronze (Paint)

Satin Nickel

0

116½"×79½"

140 %16" × 79 ½" 138 11/16" × 81"

114%"×81"





More than 100 colours available. Custom colours on demand.

Integrated Blinds

(Imagine only)



Integrated blinds are a great way to let light in during the day while ensuring absolute privacy at any moment. Easy to operate with two discreet buttons. Because the blinds are between the glass, they are virtually maintenance free.



White

Decorative **Options**



Dividers Rectangular 2", 1 × 3 or 1 × 4



Grids Rectangular or georgian %″, 3×6



Hanging Grids Rectangular or georgian %" or 1", 3×1



Edge Grids Rectangular or georgian %" or 1"

Security **Options**



Double-point mortise lock



Three-position foot lock option (Only available in white)



Security bar option (Only available in white)

Other **Options**

Configuration

- Transoms
- · Sidelites
- Aluminum sill cover (Standard for Imagine)
- PVC pocket cover
- · Reinforced screen

Glass options

- · Low E glass
- Triple glass (Imagine only)
- Tinted grey or bronze glass

Performance Options

• Sill Tower Riser for improved water resistance (630 only)

Installation options

- PVC or wood extension on 3 or 4 sides with interior PVC cladding
- PVC Brick mould and aluminum sill extension
- PVC Drywall moulding
- Nailing fin

Performance		630	IMAGINE		
	Air leakage resistance	A3	A3		
	Water penetration resistance	330 Pa — 400 Pa with Sill Tower Riser (Option)	400 Pa		
	Uniform load structural test Global	DP-45 R-PG45	DP-45		
			R-PG45		
	Laboratory tested	Reference 71½" × 81" door	Reference 71½" × 81" door		
		Harmonized standards — AAMA /WDMA /	Harmonized standards — AAMA / WDMA /		
		CSA101/I.S.2/A440-11	CSA101 / I.S.2 / A440-11		

	Insulated Glass	ER	U Value		ER	U Value		
Standard	Double-pane — Low E on face 3	36	1.65	ENERGY STAR	31	1.65		
Option	Triple-pane — Low F on face 5		_		33	1 42	ENERGY STAR	

630

Warranty



20-year limited warranty. See the detailed warranty on our website.

The information in this brochure is current as of the date of publication but is subject to change.

IMAGINE