Novatech®

Urbania & LoftAluminum Patio Doors





Urbania & Loft Aluminum Patio Doors

Courage changes everything. That's why our engineers dared to challenge the status quo and set out to reinvent the aluminum patio door. **Offering unparalleled performance and a panoramic view in two or four panel configurations**, Urbania and Loft products will turn your living space into a memorable gathering spot for family and friends where you'll feel at home.

Inifinite Design Possibilities

Urbania & Loft are available in three configurations that are trendy, functional and visually striking both inside and out. Combined with our sidelite and transom system, the possibilities are endless when creating impressively large custom window walls.

Effortless Opening and Closing

Tandem wheels and the available lift & slide mechanism make sliding oversized panels frictionless. Each detail was designed to make the panels light and their opening and closing simple and enjoyable.

Better Thermal Performance

Composite thermal barriers and an innovative sealing system are brought together to offer the highest performance ratings in their categories.

Aluminum's Undeniable Durability


Aluminum's resistance to heat, cold and corrosion, as well as its superior durability make it the best choice for a long-lasting, sturdy, maintenance-free product, especially for dark painted doors.

Enhanced Security

Urbania & Loft doors are engineered to withstand wind loads and the toughest climates. Built with standard multipoint locking mechanisms, these doors will give you the peace of mind you deserve.

- 1. Contemporary-style handle
- 2. 3" sash width for a maximized window surface
- 3. Black warm edge spacer
- 4. Thermally broken aluminum frame and sash
- 5. Clean and simple design and finish

6. Black anodized or clear anodized aluminum sill

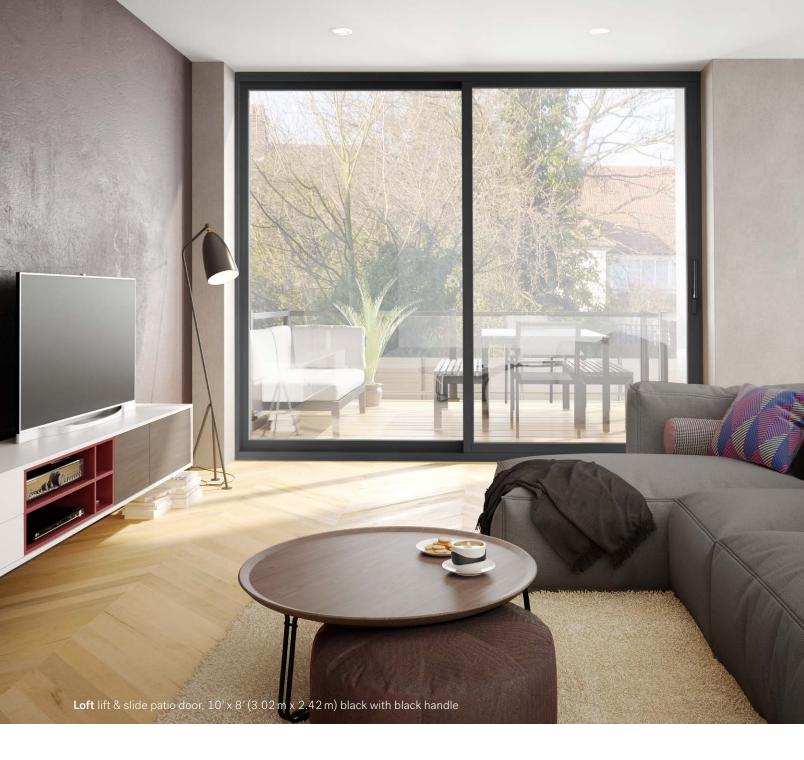

Think Bigger!

Loft — Lift & Slide Patio Door

For new construction and renovation projects alike, improve your view and let more light in thanks to the Loft door's oversized glass panels. Its lift & slide mecanism makes it possible to build sizable patio doors using only two panels, for an impressive and uncluttered view.









The Perfect Frame for a Perfect View

Urbania Panoramic

Urbania's new center opening configuration creates a very large glass surface for a prestigious look. Available up to 16 feet (4.81 m) wide and 9 feet (2.73 m) high, this configuration boasts the largest opening of our product line, making Urbania the ultimate choice for seamlessly integrating exterior and interior living spaces.







A Highly Versatile System

With their asymmetrical configuration, sidelites and transoms, the Urbania and Loft product line is a flexible and modular fenestration system that will give you the freedom to accomplish your most impressive projects.



Available in Revit Format.


Download the specifications package from our

<u>Professionnals</u> page.



Asymmetrical Configuration

Combining an impressively wide fixed sash with the ease of operation of a smaller and lighter sliding door, this configuration fits perfectly with today's trends in home fenestration and bring the "wow" factor.



Sidelites and Transoms

Our framing system allows the addition of very large transoms and sidelites to create glass walls that are as astonishing as they are efficient.



Urbania — Sliding Patio Door

Two Panels







HEIGHT	79½" (2019 mm)	81" (2057 mm)	95½" (2426 mm)	107½"(2730 mm)	
WIDTH					
5′	_	_	59½″(1511mm)	_	
6′	71½"(1816 mm)	70½″(1791 mm)	71½"(1816 mm)	71½"(1816 mm)	
8′	95½" (2426 mm)	94½" (2400 mm)	95½" (2426 mm)	95½" (2426 mm)	
9′	107" (2718 mm)	107 " (2718 mm)	107"(2718 mm)	_	

Asymmetrical Two Panels





Available left- or right-handed



HEIGHT	79½" (2019 mm)	81"(2057 mm)	95½" (2426 mm)	107½" (2730 mm)	
WIDTH					
7′	83 ½6 " (2120 mm)	82½" (2095 mm)	83 1/16 " (2120 mm)	83 1/16 " (2120 mm)	
8′	95¼"(2419 mm)	94¾"(2407 mm)	95¼"(2419 mm)	95¼"(2419 mm)	
9′	107 ³ / ₁₆ " (2723 mm)	106¾"(2711 mm)	107 3/16 " (2723 mm)	107 3/16 " (2723 mm)	
10'	119 3/16 " (3028 mm)	118 ½ (3015 mm)	119 % ° (3028 mm)	119 % (3028 mm)	

Panoramic **Four Panels**



Center opening



HEIGHT	79½" (2019 mm)	81" (2057 mm)	95½" (2426 mm)	107½" (2730 mm)	
WIDTH					
10′	_	_	117 % " (2982 mm)	_	
12'	141 % (3590 mm)	139 % (3542 mm)	141% (3590 mm)	141% (3590 mm)	
16'	189 % " (4810 mm)	187 5/16" (4758 mm)	189 % " (4810 mm)	189 % " (4810 mm)	

Loft — Lift & Slide Patio Door

Two Panels







HEIGHT	79½" (2019 mm)	81" (2057 mm) 95½" (2426 mm)		107½" (2730 mm)	
WIDTH					
6′	71½″(1816 mm)	70½" (1791 mm)	71½″(1816 mm)	71½"(1816 mm)	
8′	95½" (2426 mm)	94½" (2400 mm)	95½" (2426 mm)	95½" (2426 mm)	
9′	107" (2718 mm)	107"(2718 mm)	107"(2718 mm)	107"(2718 mm)	
10'	119" (3023 mm)	119" (3023 mm)	119"(3023 mm)	119" (3023 mm)	
12'	143" (3632 mm)	143 " (3632 mm)	143"(3632 mm)	_	

Asymmetrical **Two Panels**







HEIGHT	79½" (2019 mm)	81" (2057 mm)	95½" (2426 mm)	107½" (2730 mm)	
WIDTH					
7′	83 % (2120 mm)	82½" (2095 mm)	83 ½ (2120 mm)	83 ½ (2120 mm)	
8′	95¼"(2419 mm)	94¾" (2407 mm)	95¼"(2419 mm)	95¼"(2419 mm)	
9′	107 ¾6 " (2723 mm)	106¾"(2711 mm)	107 ³ / ₁₆ " (2723 mm)	107 ³ / ₁₆ " (2723 mm)	
10′	119 3/16 " (3028 mm)	118 ½ (3015 mm)	119 3/16 " (3028 mm)	119 3/16 " (3028 mm)	

Options

Available Colors

Frame and Sash Color Custom colors available on demand.





White K-1285

Black K-90421

Clear Anodized (Option)

Any combination of these colors on the inside and outside of the frame and sash is possible.

Sill Color



Clear Anodized outside/inside Ideal for white or light-colored doors.



Black Anodized outside / Clear inside (Option) Ideal for black and white doors.



Black Anodized outside / inside (Option) Ideal for black or dark doors


Hardware

Urbania patio door — Studio handle



^{*} Corrosion protection not available for the Brushed Nickel finish.

Loft patio door - Flow lift & slide handle

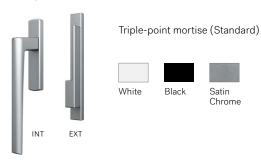

Other Options

Configuration Options

Custom sizes

Sidelites

Transoms

Custom colors on demand

1¼" triple-pane insulated glass with Low E glass*

1¼" triple-pane insulated glass with dual Low E glass*

Installation Options

Frame width: 6", 7¼", 8" or 9¼"

Nailing fin (width behind nailing fin: 4 1/16" or 6 1/16")

Aluminum brick mould

Aluminum interior drywall return

Aluminum sill extension

Accessory Options

Grilles*

Keylock (Urbania)

Stainless steel corrosion-resistant double-point locking mecanism (Urbania)

Ultra-resistant Robusto screen

^{*} Options only available for some door configurations.

Specifications

Performance

Insulated glass	U Value **		01100	Energy	ENERGY STAR
	W/m² K	BTU/(hr °F ft²)	SHGC	Rating ***	ENERGY STAR
1" double-pane, 3mm glass, Low E on surf. 3	1.87	0.33	0.57	32	_
1" double-pane, 3mm glass, Low E on surf. 2 (Option)	1.82	0.32	0.30	17	_
1" double-pane, 3mm glass, Low E on surf. 2 & 4 (Option)	1.59	0.28	0.20	17	Canada / US South & South Central
1¼" triple-pane, 3 mm glass, Low E glass surf. 5 (Option)*	1.48	0.26	0.51	37	Canada
1¼" triple-pane, 3 mm glass, Low E glass surf. 2 (Option)*	1.48	0.26	0.19	19	Canada & US all zones

^{*} Options only available for 8' × 8' doors or smaller.

Air: A3

Water: DP 50 (360 Pa)

Performance Grade: LC-PG40 without reinforcement,

CW-PG50 with reinforcement (Option) **Condensation Resistance Index:** I = 53 Reference: 95 ½" × 95 ½" door (OX/XO)

Harmonized standards — AAMA/WDMA/CSA101/I.S.2/A440-11

Noise Reduction:


4 mm + 4 mm Insulated Glass: STC 29, OITC 23 6 mm + 6 mm Insulated Glass: STC 32, OITC 27

4 mm + 8 mm Laminated Insulated Glass: STC 37, OITC 30

Many Insulated Glass configurations available to meet greater thermal performances.

Frame Configurations

Multiple configurations to simplify installation for various wall depths.

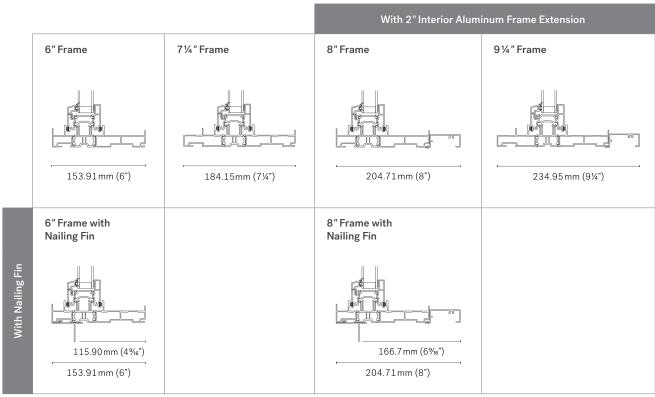

^{**} The U Value is the insulated glass' capacity to resist heat transfer. The lower this value, the better the window insulates.

^{***} The Energy Rating balances a product's U Value with its solar heat gain and airtightness. A higher value indicates a more energy efficient product.

Consider Also Your Front Door!



Discover the High Performance Door

The Novatech High Performance System features best-in-class insulation to ensure indoor comfort, superior energy performance and exceptional soundproofing. Its components are designed for durability and peace of mind, letting you rest easy for years to come.

novatechgroup.com/high-performance-system





20-year limited warranty.
See the detailed warranty on our website.

The information in this brochure is current as of the date of publication but is subject to change.

Novatech For more information, visit novatechgroup.com

